


CONSULT FACTORY  
IF LARGER

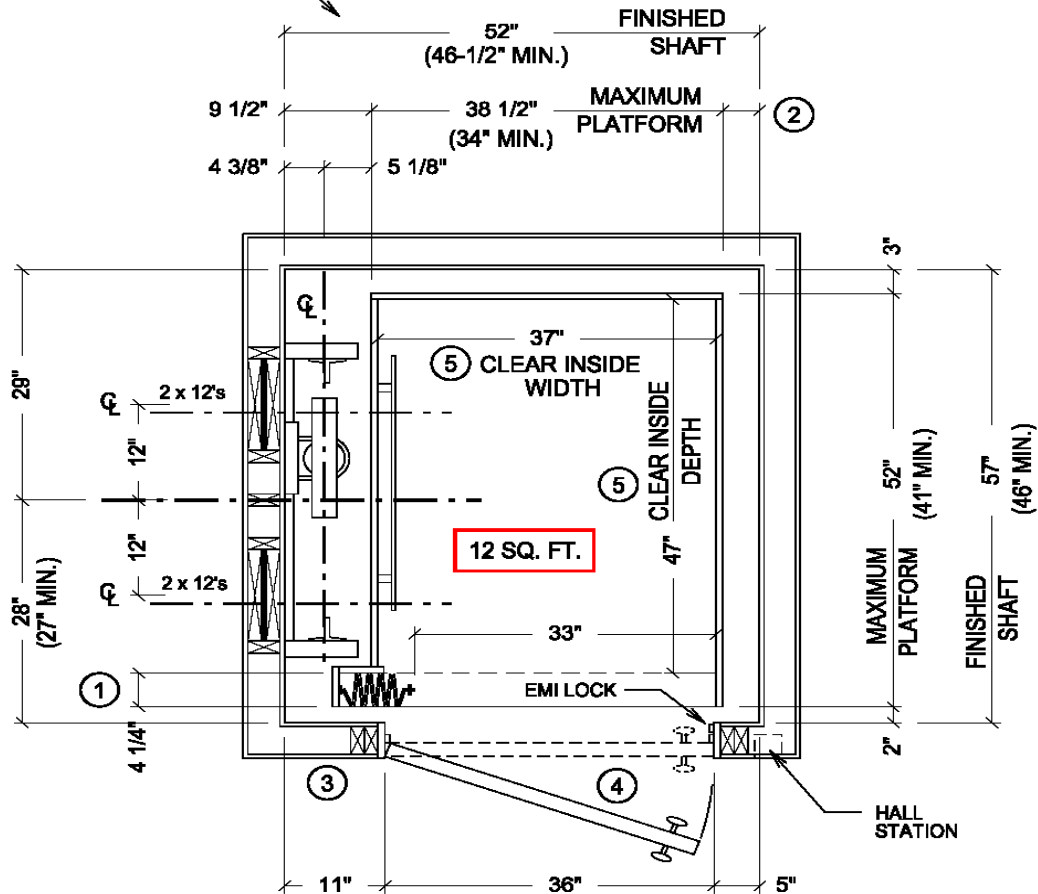

## STANDARD HOISTWAY PLAN

NOTE: ALL DIMENSIONS ARE APPROXIMATE

1. IF PLATFORM IS REDUCED, THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM.  $(\text{PLATFORM DEPTH} / 2) + 2" = \text{CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN 27" DIMENSION)}$
2. CAR TO WALL (CTW) DIMENSION IS 3" MINIMUM WITH WALL MOUNT PHONE AND 4" MINIMUM WITH PHONE BOX.
3. HOISTWAY DOORS AND FRAMES TO BE INSTALLED IN A 2" x 4" WALL CONSTRUCTION OR RECESSED INTO A DEEPER WALL CONSTRUCTION TO EQUATE TO A 2" x 4" WALL. THIS IS REQUIRED TO COMPLY WITH 3" x 5" RULE.
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS).
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN. PICTURE FRAME AND FRAME/PANEL CABS REDUCE CLEAR INSIDE WIDTH BY 1-1/2" AND CLEAR INSIDE DEPTH BY 3/4".

 **SOUTHEASTERN  
ELEVATOR**  
ELEVATORS & MOBILITY SOLUTIONS

**877-720-0075**

**JOB NAME:** 950 LB., REAR RAILS, IN-LINE OPENING,  
ACCORDION GATES, 12 SQ. FT.

**DRAWING NO:**

**CL-HYD HP2 12**